

Pump trolley

Pump trolley

Bredel

Hose Pumps

Features and benefits

- Creating flexibility in the production area
- Simple, robust and lightweight construction
- Safe and easy transport of pumps in the production area
- Robust and easy brake mechanism
- Equipped with mounting plate, earth point and cable hooks
- Ergonomic design: simple, vigorous and lightweight
- Stainless steel frame: hygienic and easy to clean




Technical specifications

	Pump trolley
Weight ranges	19 - 21 kg (42 - 46 lbs)
Max. lifting load	1000 kg
Max. lifting load	2200 lbs

Materials of construction

	Pump trolley
Baseframe	Stainless steel AISI 304
Wheels	PA6, Stainless steel AISI 304
Mounting plate assembly	Stainless steel AISI 304
Cable hook	Stainless steel AISI 304

Pump trolley dimensions

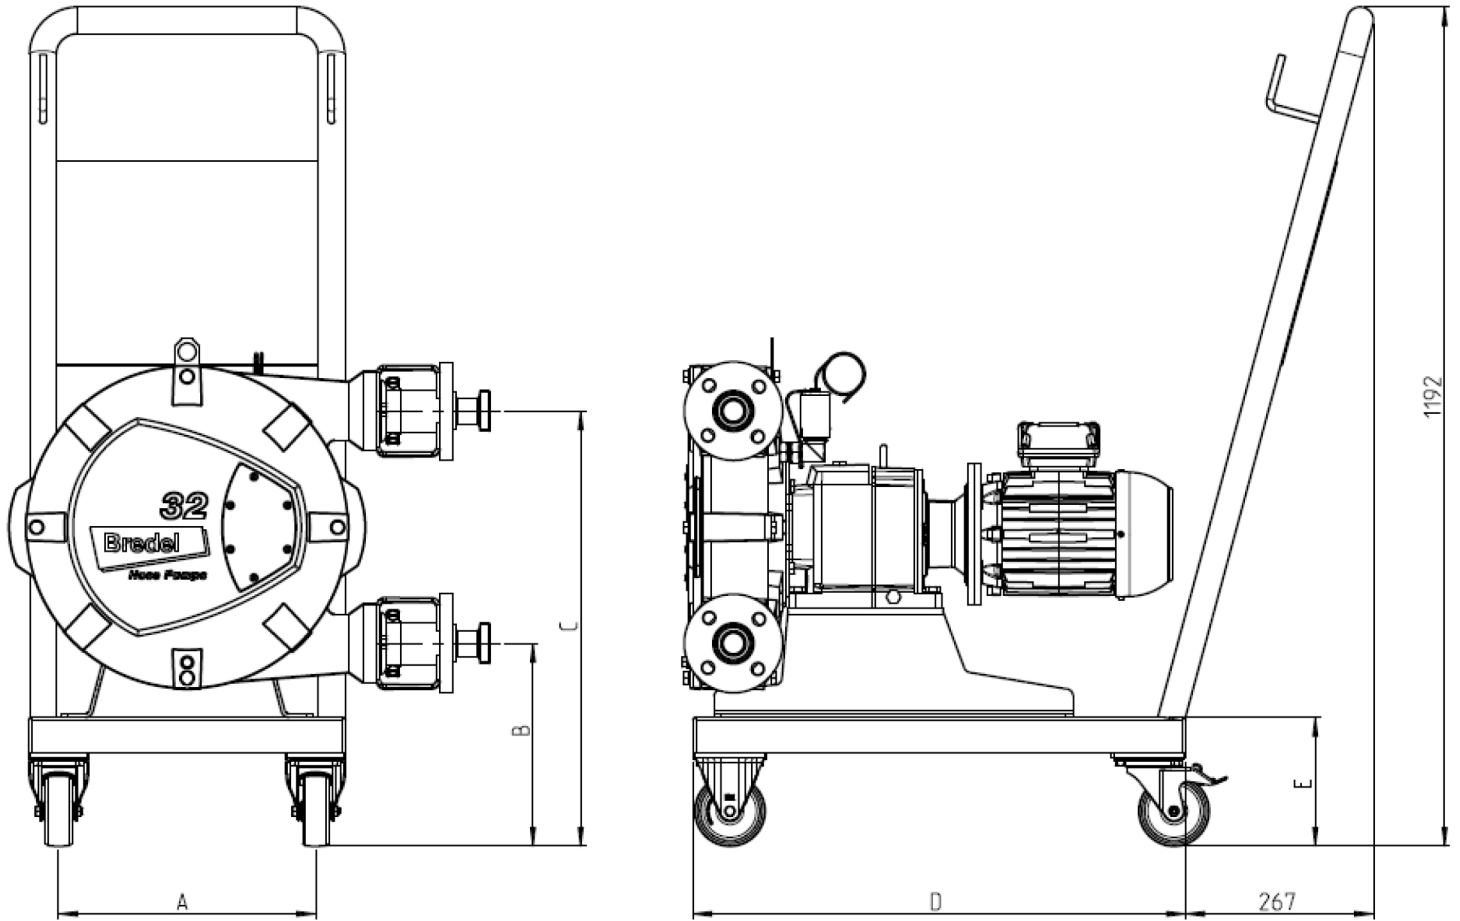

Pump size	A	B	C	D	E	Weight	Max. load
Bredel 10-20	365	281	545	700	183	20 [kg] / 44 [lbs]	1000 [kg] / 2200 [lbs]
Bredel 25-32	365	288	618	700	183	20 [kg] / 44 [lbs]	1000 [kg] / 2200 [lbs]
Bredel 40	455	293	723	700	183	19 [kg] / 42 [lbs]	1000 [kg] / 2200 [lbs]
Bredel 50	595	226	180	780	183	21 [kg] / 46 [lbs]	1000 [kg] / 2200 [lbs]
APEX10-20	365	281	545	700	183	20 [kg] / 44 [lbs]	1000 [kg] / 2200 [lbs]
APEX28-35	365	283	613	700	183	20 [kg] / 44 [lbs]	1000 [kg] / 2200 [lbs]

Dimensions in mm

Product codes

Trolley size	Article code
Bredel 10-32 / APEX10-35	28-1007090
Bredel 40	28-1007091
Bredel 50	28-1007092

Disclaimer: The information contained in this document is believed to be correct at the time of publication, but Watson-Marlow Bredel BV accepts no liability for any error it contains, and reserves the right to alter specifications without prior notice. All mentioned values in this document are values under controlled circumstances at our test bed. Actual flow rates achieved may vary because of changes in temperature, viscosity, inlet and discharge pressures and/or system configuration. APEX, DuCoNite, Bioprene and Bredel are registered trademarks.



wmfts.com/global
13 October 2025