

# 400/N6 pumphead

400/M and N series pumpheads

## Features and benefits

- 6 channel compact pump design
- Works with 1.0 mm wall thickness tubing and barbed fittings
- Complete pump with motor, or as pumphead only
- Pumphead available in PVDF for greater chemical compatibility



## Technical specifications

	400/N6 pumphead
Number of channels	6
Max. flow rate continuous	150 ml/min
Operating temperature	41 °F to 113 °F (-10 °C to 45 °C)
Pump type	Panel mount
Weight	lbs ( kg)
Compatible tubing bore size	0.5, 1, 2, 3 mm
Compatible tubing wall thickness	1 mm


## Materials of construction

	400/N6 pumphead
Pumphead body assembly	Acetal (gray)
Pumphead track	Acetal (gray)
Pumphead roller assembly	Acetal (black)
Pumphead rotor assembly	Acetal (black), Stainless steel

Information listed covers the complete range.

For detailed specifications of individual models/components refer to user manual or contact WMFTS representative.

## 400/N6 pumphead dimensions

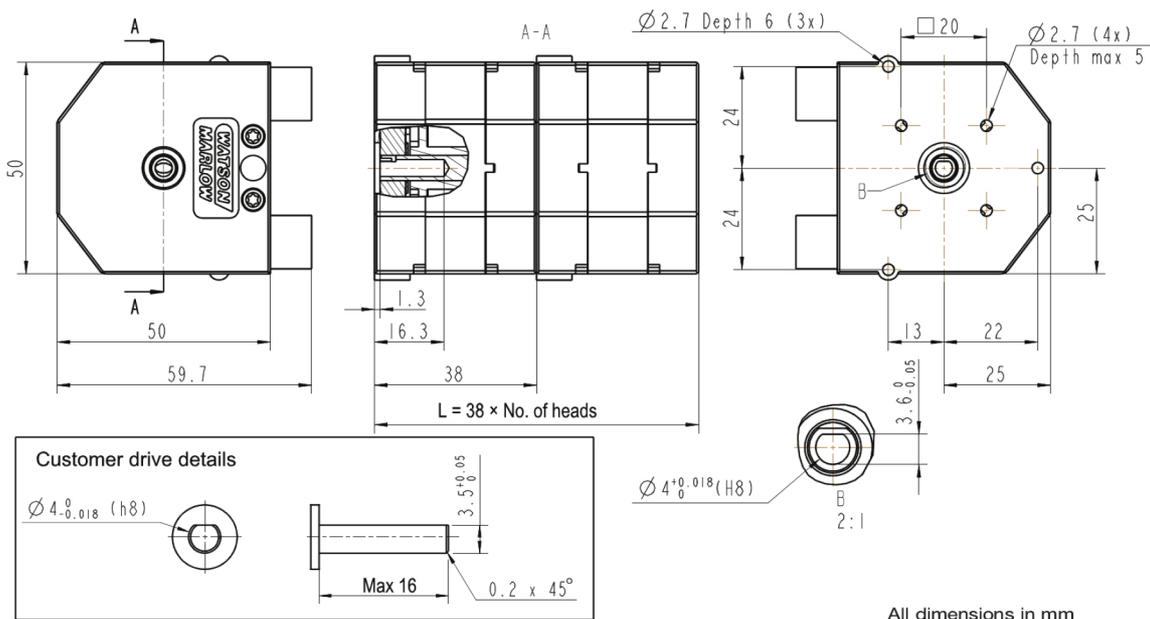

## Product codes

---

Disclaimer: All flow rates shown were obtained pumping water at 20 °C (68 °F) with zero suction and delivery heads. Watson-Marlow, Pumpsil, PureWeld XL, Bioprene and Marprene are trademarks of Watson-Marlow Limited. Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains, and reserves the right to alter specifications without notice. GORE and STA-PURE are trademarks of W. L. Gore & Associates. Please state the product code when ordering pumps and tubing.



[wmfts.com/global](https://wmfts.com/global)  
10 July 2025